









DORVAL ATELIER 01

The Dorval Atelier looks like it was dipped in a pool of metallic liquid, making it an utterly refined, almost magical version of the impressively technical original model. Entirely made of brass, the Dorval Atelier stuns by stripping down and glorifying the process of making such a piece. Brass is a lively material which morphs with time, and ages elegantly. This model aims to be an ode to our most-used material, juxtaposed here on one of our most contemporary models.

Dorval Collection is a collaboration with SCMP Design Office.

- type:** pendant
- construction:** brass body, head, canopy and cord
clear prismatic PMMA lens
- specifications:** source: LED array, integrated
power consumption: 36W
color temperature: 3000K
2700K
dim to warm 3000k to 2200k
dim to warm 2700k to 2200k
lumen output: 3000K - 3106 lm
2700K - 2888 lm
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: $\geq 50\ 000$ h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)
220-240V on/off or trailing edge dimming only
refer to our recommended list of dimmer models
- cord length:** 108" / 275cm
- weight:** 35lb / 16kg
*mounting surface must be able to support 200lbs / 91kgs
- certifications:**     IP20
- warranty:** 2 years

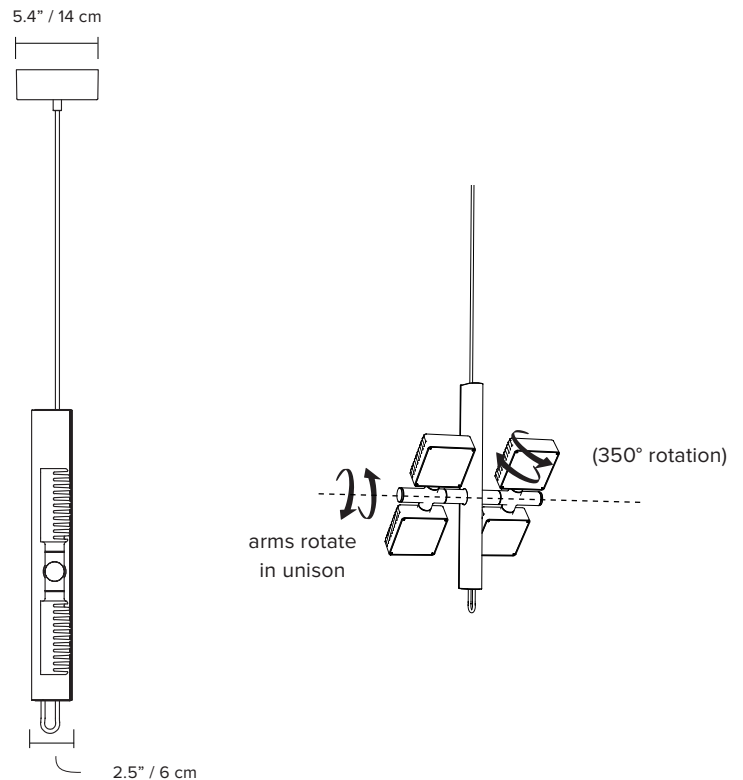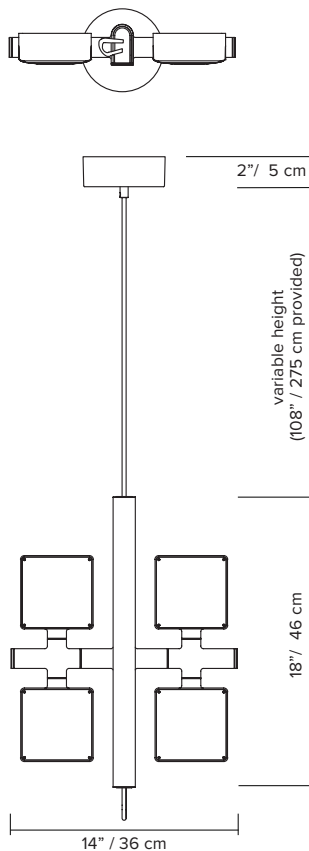

*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU

COLLECTION	MODEL	FINISH	COLOUR TEMPERATURE (CCT)	DIMMING
DOR dorval	51	BR brass	WL warm light (2700K)	ZT 0-10V dimming
			NL neutral light (3000K)	PH phase dimming
			D27 dim to warm (2700K-2200K)	
			D30 dim to warm (3000K-2200K)	
			CCT other CCT available upon request *	
DOR	51	BR	WL	ZT = DOR51BRWLZT example

FINISH




brass

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not to be suspended by a hook
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

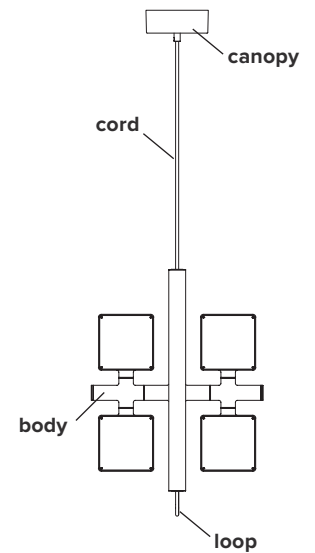

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Phase dimming (trailing edge only**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

