


GARDE

KORA BRONZE SCONCE

The KORA collection interprets a spherical form as an adjustable sconce, pendant, and flush mount in a style reminiscent of the 1970s. Also available in plaster and aluminium. KORA bronze sconce also exists in outdoor use.


Finishes / bronze



Black patinated bronze




Brown patinated bronze




Gold patinated bronze

Technical Specifications

Dimensions	Diam. 16 cm (6.3 in) × Depth 15 cm (5.9 in)	
Materials	bronze	
Weight	5 kg / 11 lbs	
Lamping	1 × GU10 LED spot lamp - max. 8W - 575 lm - 2700 K - dimmable	
Voltage	EU: 220–240 V	US: 120 V
Certifications		UL Recognized components
Protection	IP20 standard IP65 optional	Dry location
Flush-mounted electrical box	N/A	
Lead time	12 - 14 weeks	



15 cm
5,9 in



16 cm
6,3 in

15 cm
5,9 in



Finishes / plaster



White plaster


GARDE

KORA PLASTER SCONCE

The KORA collection interprets a spherical form as an adjustable sconce, pendant, and flush mount in a style reminiscent of the 1970s. Also available in bronze and aluminium.


Technical Specifications

Dimensions	Diam. 17 cm (6.5 in) × Depth 15 cm (6 in)	
Materials	plaster	
Weight	1.5 kg / 3.3 lbs	
Lamping	1 × GU10 LED spot lamp - max. 8W - 575 lm - 2700 K - dimmable	
Voltage	EU: 220–240 V	US: 120 V
Certifications		UL Recognized components
Protection	IP20 standard IP65 optional	Dry location
Flush-mounted electrical box	N/A	
Lead time	12 - 14 weeks	

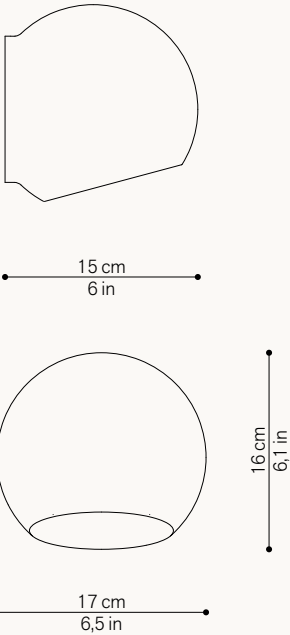



Finishes / cast aluminium



Cast aluminium

GARÐE

KORA ALUMINIUM SCONCE

The KORA collection interprets a spherical form as an adjustable sconce, pendant, and flush mount in a style reminiscent of the 1970s. Also available in plaster and aluminium. KORA aluminium sconce also exists in outdoor use.

Technical Specifications

Dimensions	Diam. 16 cm (6.3 in) × Depth 15 cm (5.9 in)	
Materials	cast aluminium	
Weight	1.6 kg / 3.5 lbs	
Lamping	1 × GU10 LED spot lamp - max. 8W - 575 lm - 2700 K - dimmable	
Voltage	EU: 220–240 V	US: 120 V
Certifications	CE	UL Recognized components
Protection	IP20 standard IP65 optional	Dry location
Flush-mounted electrical box	N/A	
Lead time	12 - 14 weeks	

