

Softspot Wall Vertical

SSWAVR

IP20

Materials

Hand finished or electroplated brass.

Weight incl. canopy

-2.5 lbs


Power Input

110-120V 50-60Hz

Light Source (included)

Proprietary Softspot75 LED,
9W, 380 Lumens, 2700K warm white. CRI>95.
75% downwards and 25% upwards

Custom vertical frame dimension available
on request.

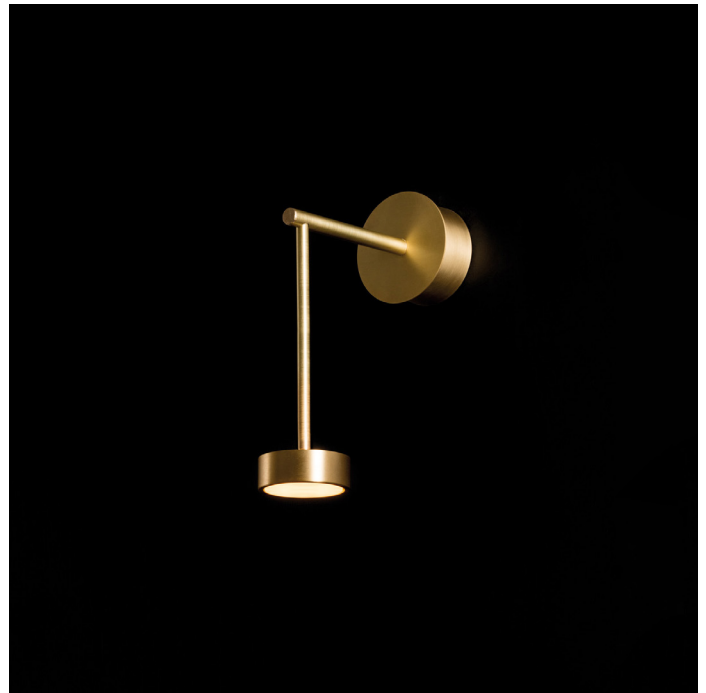


SOFTSPOT WALL VERTICAL 27


CONFIGURATION

STEP 1 - CHOOSE YOUR LIGHT BEAM

MODEL (UNIT: IN)

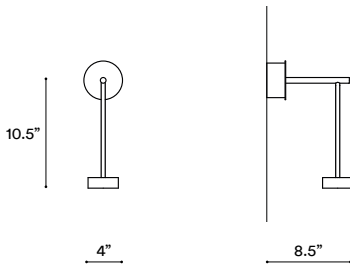

FIXED BEAM

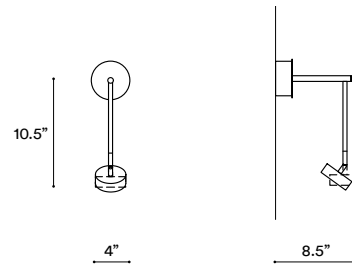

ORIENTABLE BEAM

STEP 2 - CHOOSE YOUR METAL FINISH

METAL FINISH




STEP 3 - CHOOSE YOUR CANOPY AND DRIVER

CANOPY AND DRIVER

+ Single canopy with built-in phasecut driver. Recommended.

Ø5.5" X H1.5"

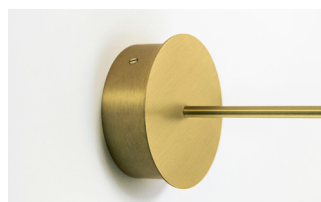


MATCHING FINISH

PHASECUT

+ Single canopy with built-in driver and alternative dimmable standards, if required by electrician.

Ø5.5" X H1.5"

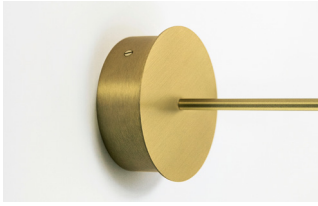

MATCHING FINISH

1-10 VOLT

Brushed Brass

Brass hand finished with horizontal brushing. Protected with a semi-gloss transparent coating.

Brushed Bronze

Brass with accelerated aging to become a bronze finish. Hand finished with horizontal brushing. Protected with a semi-matt transparent coating.

Blackened Brass


Brass with accelerated aging to become an extra dark chocolate finish. Hand finished with horizontal brushing. Protected with a semi-matt transparent coating.

Brushed Nickel

Electroplated nickel over Brass with horizontal brushing. Protected with a semi-gloss transparent coating.

Polished Nickel

Electroplated Nickel over polished brass. Protected with a semi-gloss transparent coating.

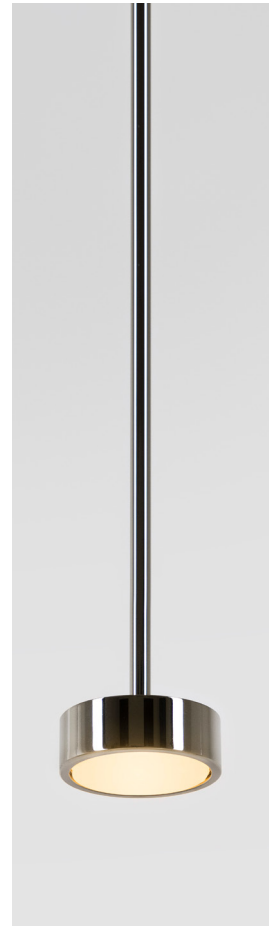

Custom Finish

Our products can be customized with most metal finishes, please check with our design advisors if you have any particular requirement.

Please advise if our products are to be installed close to air conditioning vents or in windy or salty air conditions.